




High Pressure Cleaners

LASLO S.R.L.

Via Bergamo, 34/a
26029 Soncino (CR)
Tel. +39 0374 83207
Fax +39 0374 84264
idro@castello-srl.com
www.castello-srl.com

URANO BIG Line SUPER PROFESSIONAL High Pressure Cleaners Hot Water

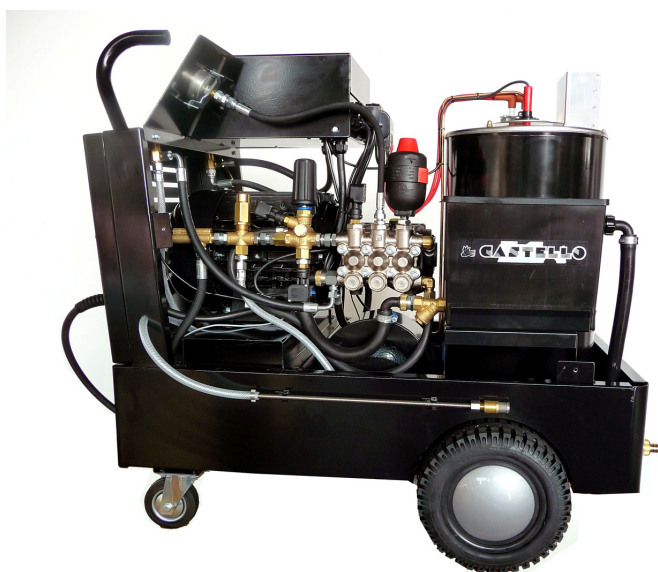

TECHNICAL FEATURES

Line URANO BIG - SUPER professional hot water, thanks to its SUPER BOILER model C3, makes it ideal for all those applications where there must be high pressure and constant water high water temperature

It is built on a strong black epoxy painted frame, with 2 fixed and 2 pivoting wheels. The cover is STAINLESS STEEL AISI 304 or AISI 430

Available also with voltage at 60 HZ

Model	Pressure	Water dly	Engine power	Absor.power	Voltage
URANO 15/21	30-150 BAR	300-1260 lt/h	7.5 HP	6,5 KW	TRI 230-400V 50 HZ
URANO 25/15	30-250 BAR	300-900 lt/h	10 HP	8,5 KW	TRI 230-400V 50 HZ
URANO 20/21	30-200 BAR	300-1260 lt/h	10 HP	8,5 KW	TRI 230-400V 50 HZ

Laslo s.r.l.
C.F. e P.IVA 01464570199
REA CR 173789
Capitale Sociale Euro 12.000,00 i.v.a.

TECHNICAL DESCRIPTION line URANO BIG

- HP pump with 3 on line ceramic pistons
- Electrical motor 230-400 V with 2 bearings and thermal overload protection
- Vertical boiler with weldless double coil 3/8";; bottom made of refractory cement
- Delayed start of 6 sec. of the burner spark
- Independent burner
- Flame control of the burner by photocell for the maximum safety standards
- Tank deposit water complete with automatic float level
- Machine stop in case of micro-leakages
- Device on the control panel for the suction of the detergent on high pressure
- Temperature 30° - 100°C
- Thermostat regulation temperature 30°-100° C
- Nr. 3 pressure switches and 1 flow switch
- Pressure safety valve
- Automatic stop of the machine if left idle for 30 min
- Waterproof electric panel at 24 volts complete of remote control switch and thermal overload
- Transformer 230-400-24 Volt
- Electronic card for delayed total stop adjustable 0-30 sec
- Stop of burner for lack of fuel
- Stop of machine for lack of water
- Anti-shock dumper
- Pressure gauge for pressure adjustment
- By pass valve
- Pressure and water adjustment device on the control board
- Inlet water filter
- Water filter before the pump
- Non-return detergent filter
- Fuel filter
- Fuel tank 23 lt
- Double steel plaited high pressure hose 10 mt
- Service lance of 120 cms with automatic gun
- Stainless steel water nozzle

ON DEMAND

- Antiscale device